

Strip Series B200 Wire Stripping Machine




Ultra-fast Wire Stripping in just 0.4 Seconds

The Strip Series B200 offers quality, robustness, operator simplicity and mobility with an excellent return on investment (ROI). Its precise and solid mechanics, combined with a high-speed motor, enable short cycle times and deliver high production output while maintaining impressive repeat accuracy.

The Strip Series B200 performs both full and partial stripping for cables with an outer diameter of up to 4 mm (0.16"), or 3.3 mm² (12 AWG), a stripping length of up to 25 mm (1") and a minimum insertion depth of 14 mm (0.55"). With upgraded thin grippers, it can even achieve insertion depths as low as 11 mm (0.43"). The Strip Series B200 is capable of processing PVC, PE or PP cables, cables for miniaturized housings and cables with minimal distance between the jacket and the crimp.

No programming experience or extensive training is required to operate the Strip Series B200. All parameters are easily adjusted manually by the operator using rotary knobs.

Application Samples

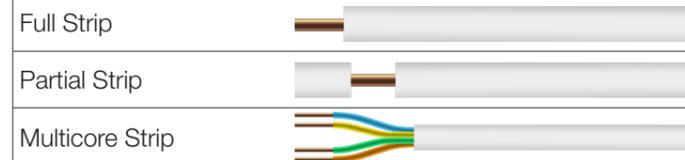


Benefits

- Ultra-fast wire stripping in just 0.4 seconds
- Lightweight design with only 4.5 kg (10 lbs.)
- Simple and intuitive for fast change over
- Flexible use with any standard power socket
- Ergonomic activation via sensor or foot pedal



Cutting-/stripping head with blow out unit

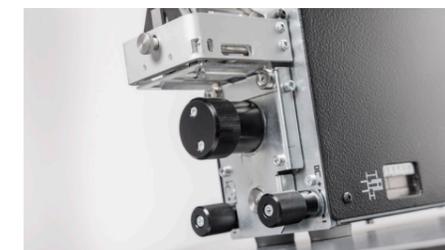

Rotary knobs for parameter adjustments



Rear view with on-/off switch and power inlet



Footpedal

The entry-level Strip Series B200 is the ideal solution for simple wire stripping applications.

Important Technical Specifications

Conductor Cross Section:	0.03 to 3.3 mm ² (32 to 12 AWG)
Raw Material Diameter:	0.2 - 4 mm (0.007 - 0.16")
Raw Material Type:	Single strands
Strip Length:	1.5 - 25 mm (0.039 - 1")
Pull-off Length:	2 - 25 mm (0.08 - 1")
Insertion Depth Min.:	14 mm (0.55") with standard gripper / 11 mm (0.43") with thin gripper 6.6 mm (0.26") with short insertion depth option
Trigger Mechanism:	Sensor Foot pedal (optional)
Clamping Force:	Mechanically adjustable
Compressed Air:	5 - 7 bar (72 - 101 psi)
Dimensions (L/D x W x H):	351.5 x 79.1 x 169.3 mm (13.83 x 3.11 x 6.66")
Weight:	4.5 kg (9.92 lbs.)
Declaration of Conformity:	The Strip Series B200 fully complies with the CE and EMC machinery directives relating to mechanical and electrical safety and electromagnetic compatibility, as well as UKCA, UL, and CSA.

Technical specifications subject to change. Copyright © 2025 Schleuniger AG, 3608 Thun, Switzerland | www.komaxgroup.com/en/brands/schleuniger

 Enjoy precise and efficient wire stripping. Anytime, anywhere.